


40-603-1

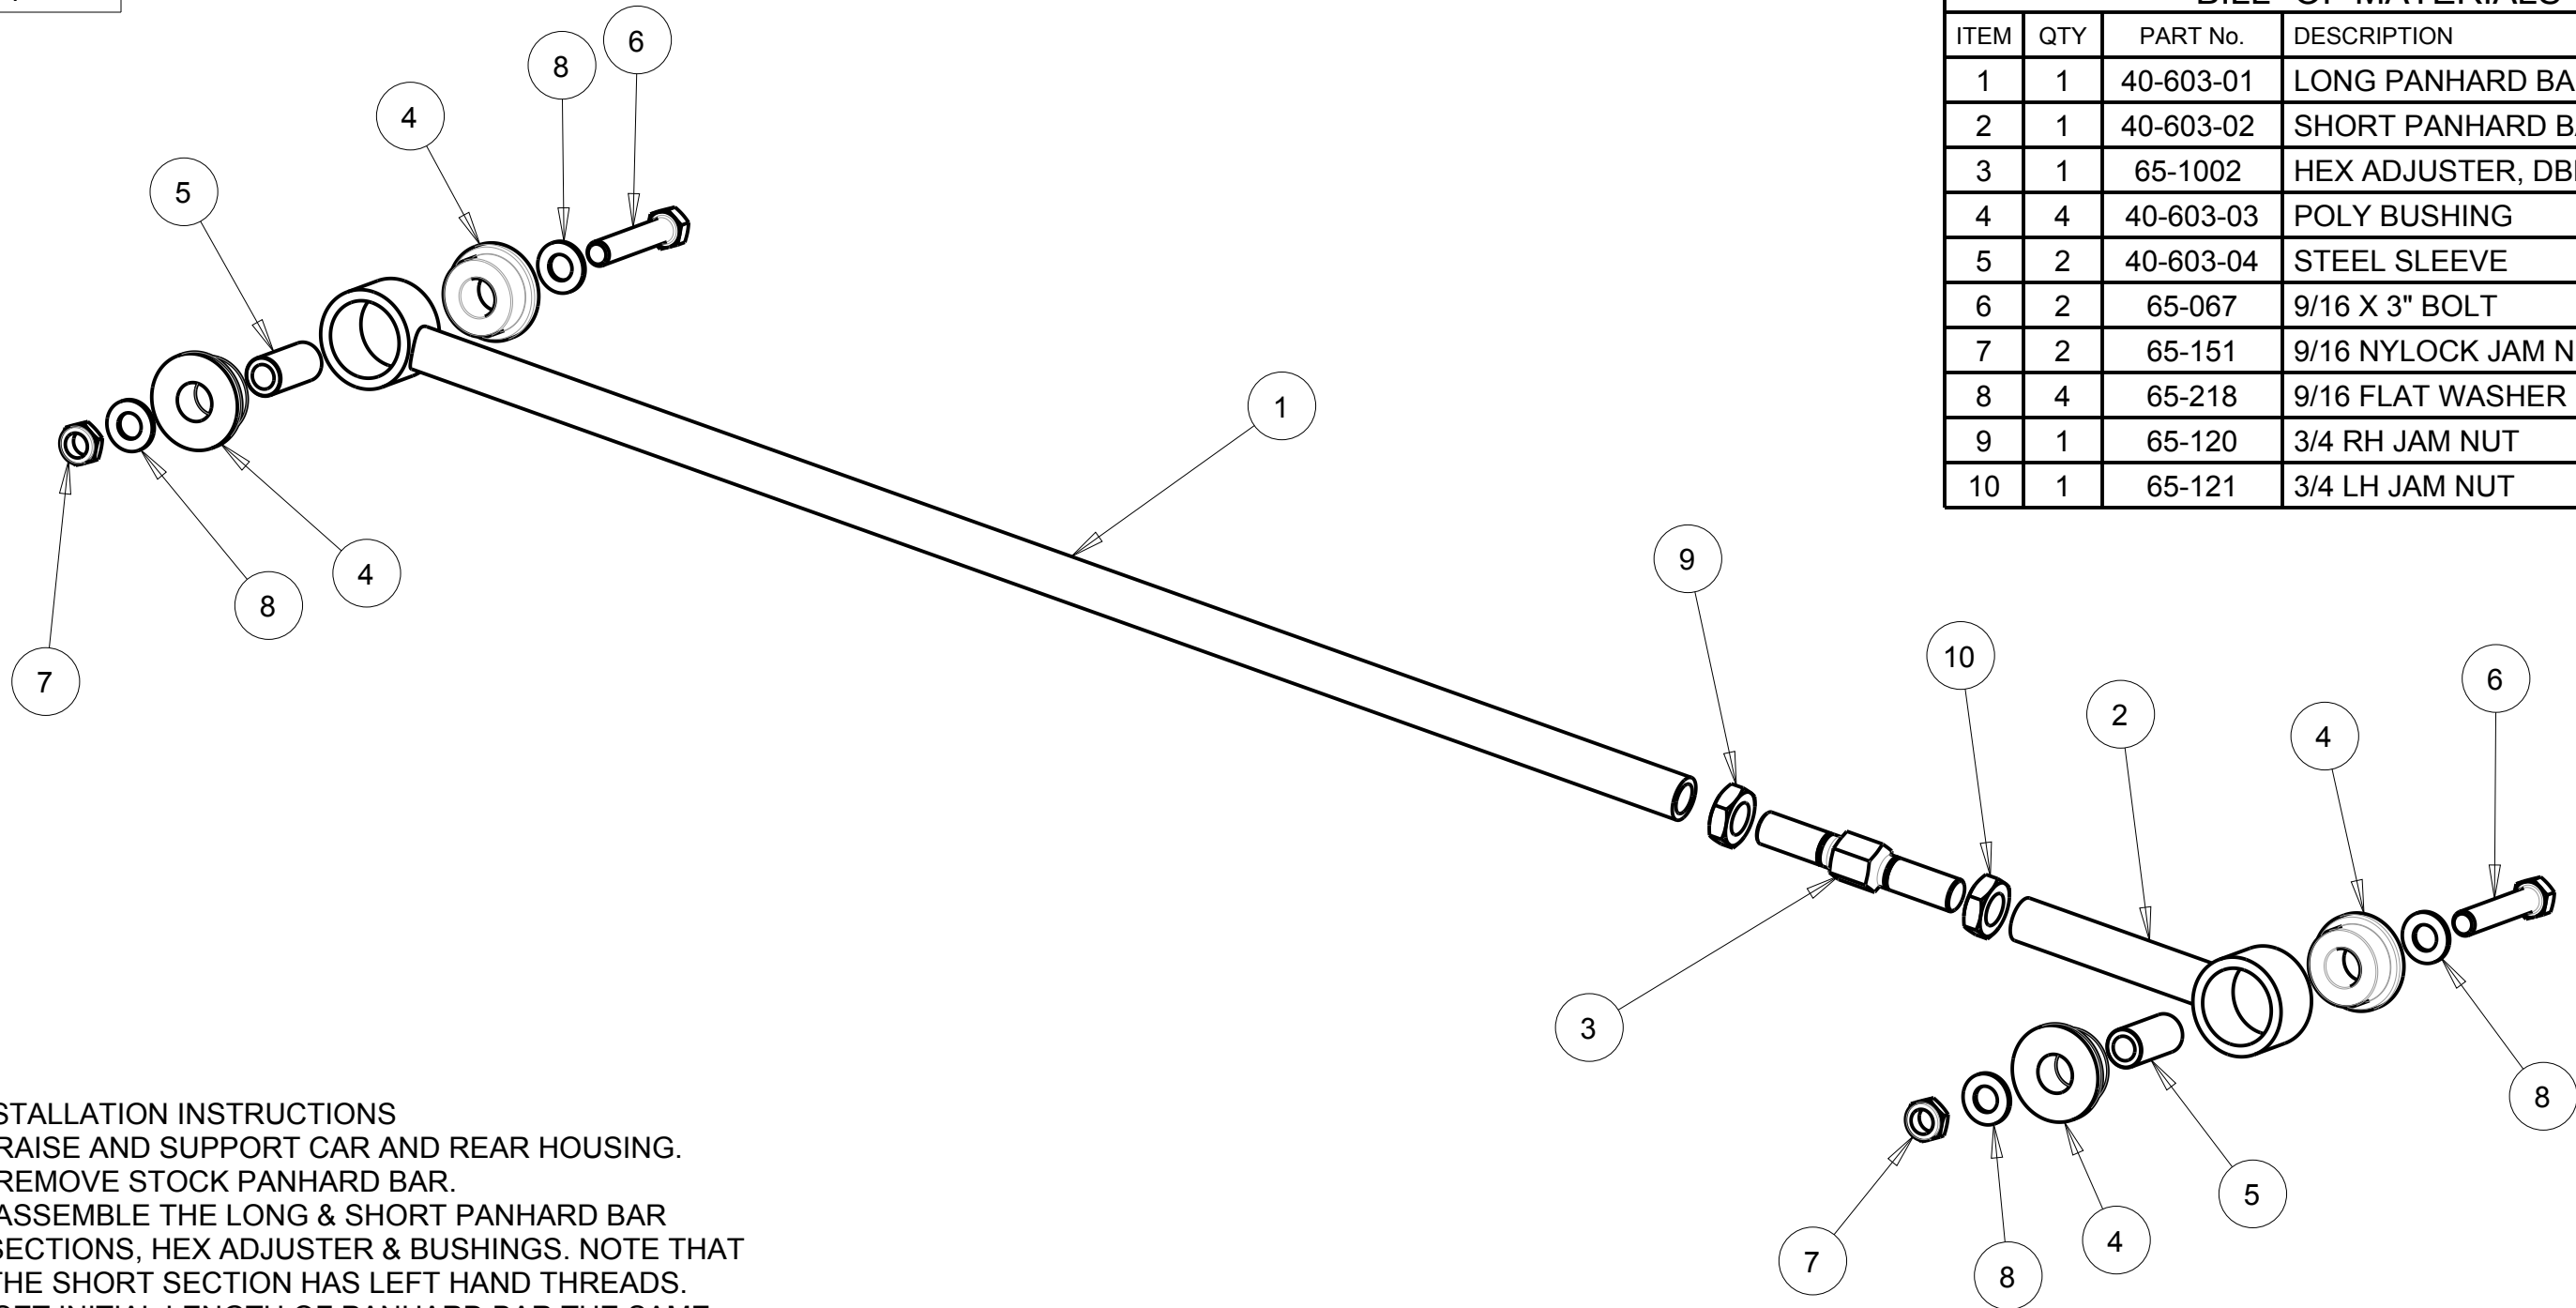

**BILL OF MATERIALS**

ITEM	QTY	PART No.	DESCRIPTION
1	1	40-603-01	LONG PANHARD BAR SECTION
2	1	40-603-02	SHORT PANHARD BAR SECTION
3	1	65-1002	HEX ADJUSTER, DBL MALE
4	4	40-603-03	POLY BUSHING
5	2	40-603-04	STEEL SLEEVE
6	2	65-067	9/16 X 3" BOLT
7	2	65-151	9/16 NYLOCK JAM NUT
8	4	65-218	9/16 FLAT WASHER
9	1	65-120	3/4 RH JAM NUT
10	1	65-121	3/4 LH JAM NUT

**INSTALLATION INSTRUCTIONS**

1. RAISE AND SUPPORT CAR AND REAR HOUSING.
2. REMOVE STOCK PANHARD BAR.
3. ASSEMBLE THE LONG & SHORT PANHARD BAR SECTIONS, HEX ADJUSTER & BUSHINGS. NOTE THAT THE SHORT SECTION HAS LEFT HAND THREADS.
4. SET INITIAL LENGTH OF PANHARD BAR THE SAME AS THE STOCK LENGTH PANHARD BAR YOU REMOVED. DO NOT TIGHTEN THE JAM NUTS AT THIS TIME.
5. PUT PRE-LUBE ON THE FACES OF THE POLY BUSHINGS & THE ID OF THE STEEL SLEEVES.
6. INSTALL THE PANHARD BAR IN THE CAR.
7. WITH THE CAR AT RIDE HEIGHT AND THE WEIGHT ON THE TIRES CHECK THAT THE REAR IS CENTERED, ADJUST IF REQUIRED. TIGHTEN ALL NUTS AND BOLTS.

A	09APR07	JEB	CHANGED HEX ADJUSTER
0	03NOV99	JEB	INITIAL RELEASE
REV	DATE	DRN	DESCRIPTION
TOLERANCES: FRACTIONS ±1/32 2 PLC DEC ±0.01 3 PLC DEC ±0.005 ANGLES ±0.5°			ADJUSTABLE PANHARD BAR 82-03 CAMARO
MAT'L: prt.material			
PART No: 40-603			DRW No: 40-603 - 1

S & W RACE CARS  
11 MENNONITE CHURCH RD  
SPRING CITY, PA 19475