


40-715-1

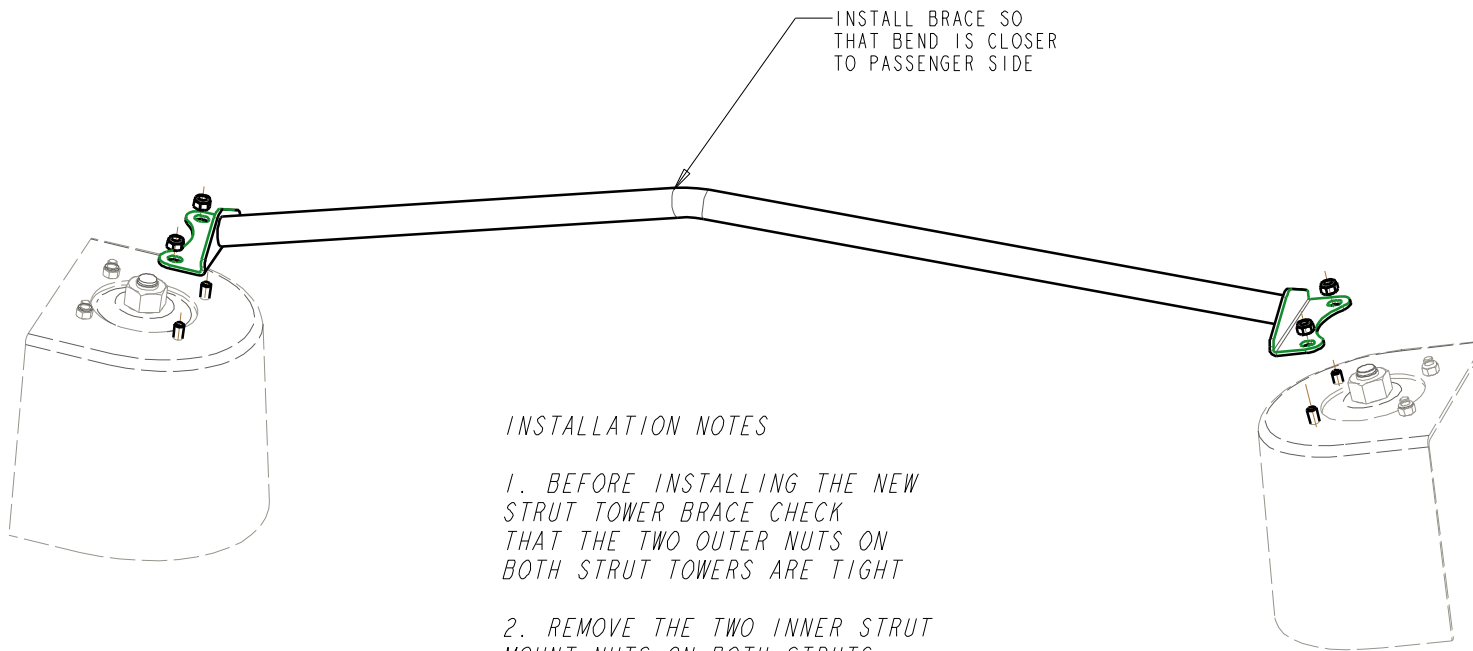

INSTALLATION NOTES

- 1. BEFORE INSTALLING THE NEW STRUT TOWER BRACE CHECK THAT THE TWO OUTER NUTS ON BOTH STRUT TOWERS ARE TIGHT*

- 2. REMOVE THE TWO INNER STRUT MOUNT NUTS ON BOTH STRUTS. SET THE NEW STRUT TOWER BRACE IN PLACE, PUT THE NUTS BACK ON THE STUDS AND TIGHTEN. NOTE: USE LOCK TIGHT OR SIMILUR PRODUCT ON NUTS.*

S & W RACE CARS
11 MENNONITE CHURCH RD
SPRING CITY, PA 19475

REV	DATE	DRN	DESCRIPTION
0	25SEP06	JEB	INITIAL RELEASE
TOLERANCES: FRACTIONS $\pm 1/32$ 2 ^o PLC DEC ± 0.01 3 ^o PLC DEC ± 0.005 ANGLES $\pm 0.5^{\circ}$			STRUT TOWER BRACE GENERAL ARRANGEMENT
PART No: 40-715			DRW No: 40-715 - 1