


# CUSTOM DRIVESHAFT ORDER FORM

Figure 1


If you are buying a driveshaft complete with a new transmission slip yoke, you must supply us with the measurement from the rear of the transmission housing to the centerline of the rear universal joint or forward edge of the pinion yoke. As shown in figure 1.

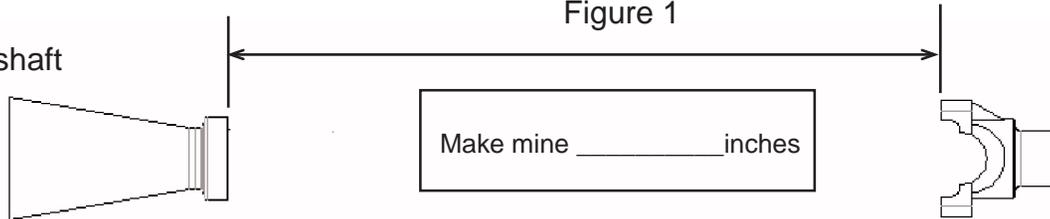


*Take all measurements with the rear housing supported at ride height!*

Figure 2

If you are buying a driveshaft and re-using your existing transmission slip yoke, you must supply us with the measurement from the centerline of the front universal joint to the centerline of the rear universal joint or forward edge of the pinion yoke. You must first install your transmission slip yoke by pushing it all the way into the transmission tailshaft housing until it is fully seated **and then pulling it back out 1"** As shown in figure 2.

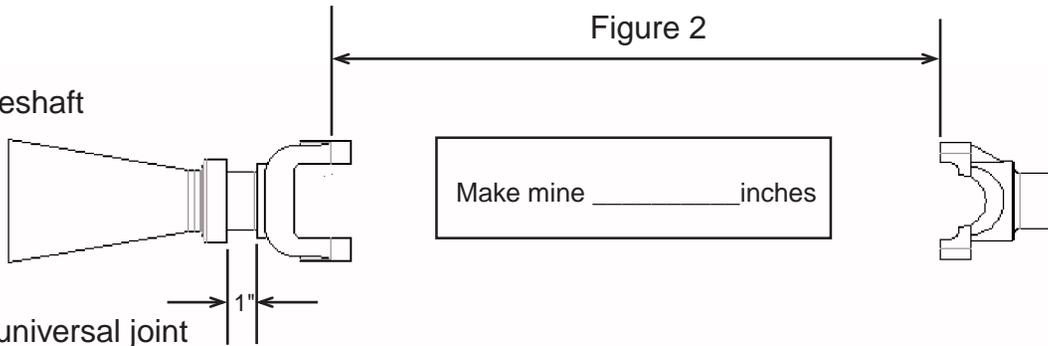

*Take all measurements with the rear housing supported at ride height!*

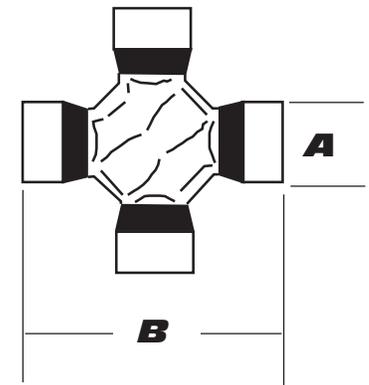

**"A" dim. "B" dim. Type Description**

1-3/16"	3-5/8"	Super duty 1350
1-1/16"	3-5/8"	Heavy duty 1330
1-1/16"	3-7/32"	Standard 1310

*Please measure all four caps (A) and across both spans (B)*

Cap dia. (A) .....

Span (B) .....

**Please supply dimension for either figure 1 or figure 2 according to the instructions and for the universal joint size. Your driveshaft will be made to these specifications. Please review your data carefully and if you feel this is not what you ordered call us at 1-800-523-3353. Otherwise please sign and return this form.**

***This form must be returned before the driveshaft will be madet!***

Name: \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Daytime Phone # (\_\_\_\_\_) \_\_\_\_\_ Fax # (\_\_\_\_\_) \_\_\_\_\_

Customer # \_\_\_\_\_ Order Date \_\_\_\_\_ Salesman \_\_\_\_\_

Customer Signature Required \_\_\_\_\_



11 Mennonite Church Rd.  
Spring City, PA 19475  
1-800-523-3353 - FAX - 610-948-7342